




Type: - Dorpro Flag Hinge

Lateral Adjustment (mm) +/- 4mm

Height Adjustment (mm) +/- 4mm

Finishes: - White, Black, Chrome, Brass, Black Chrome, Brushed Chrome

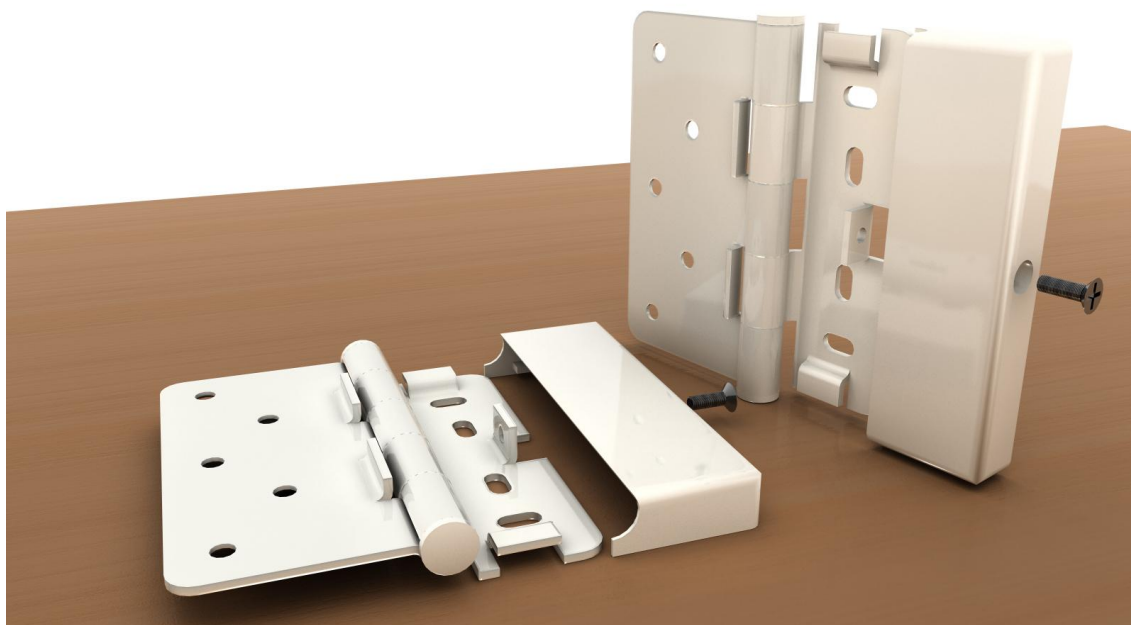

Adjusting the Dorpro Flag Hinge

1. Remove Screw on Edge of Cover plate.
2. Remove cover Plate by sliding out towards the lock side to expose the screws.
3. Remove the two screws in the lateral position and undo the screws on the height position by two turns.
4. Repeat this on the other two hinges.
5. Lift the door to the correct position and use packers to keep door in the required position.
6. Tighten screws in the height position and insert screws in the lateral position (new holes might have to be drilled).
7. Slide cover plate back on and insert screw.
8. If lateral movement is required, repeat the above in reverse order.